

Model 2252 — Recessed Model 2252-10 — Semi-Recessed (recesses 3½"; projects 4") Model 2252-11 — Surface-Mounted (projects 7½")

Standard Series — Satin Finish

Product Materials

CABINET: 22-gauge stainless steel with exposed surfaces in architectural satin finish. Welded construction with seamless corners and burr-free edges.

FLANGE: 22-gauge stainless steel with exposed surfaces in architectural satin finish. One piece seamless construction, 1" wide with ¼" return.

DOORS: 18-gauge stainless steel. Warp resistant, with full length piano hinge and tumbler lock keved like other Bradlev units.

TOWEL DISPENSER: 22-gauge stainless steel. Rolled edge on dispenser

opening

WASTE RECEPTACLE INSERT: Leak-proof molded plastic.

Capacity

Towel Dispenser — 1000 single-fold, 700 multi-fold or 400 C-fold paper towels. Waste Receptacle Insert — 4.9 gal. (.65 cu. ft.)

Operation

Towel dispenser holds single-fold, multi-fold or C-fold towels without use of special adaptor. Waste receptacle insert removable by unlocking receptacle door.

Installation

Verify all rough-in dimensions prior to installation. Recessed unit requires rough wall opening 12½"W x 54½"H x 7½"D (Semi-recessed unit only 3½" deep). Secure to framing with mounting screws (included) at holes provided. Shim at screw points as required. Surface-mounted units must have holes drilled by installer.

Guide Specification

Recessed combination towel dispenser and waste receptacle shall be fabricated of 22-gauge stainless steel with exposed surfaces in satin finish. Doors of non-flexing construction, equipped with heavy duty piano hinges and locks. Towel dispenser capacity 1000 single-fold, 700 multi-fold or 400 C-fold towels. Removable 4.9 gal. leak-proof molded plastic insert for waste receptacle.

Overall dimensions: 14"W x 56"H x 71/2"D.




ADA Compliant

Consult local and national accessibility codes for proper installation quidelines.

Conformity and compliance to local and national codes is the responsibility of the installer.



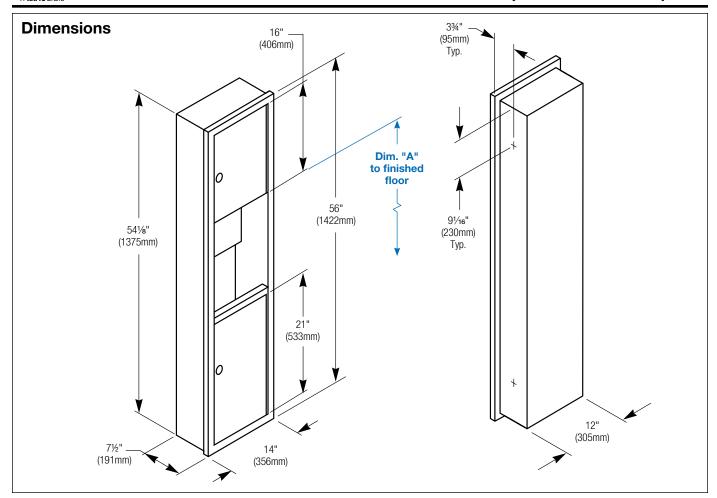

Dim. "A" Key Surface:	For Dim. "A"	Top of Rough Wall Opening	Bottom of Rough Wall Opening
Paper towel top of opening to finished floor	48" (1219mm)	64¼" (1632mm)	95⁄8" (244mm)
	45" (1143mm)	61¼" (1556mm)	65/8" (168mm)
	42" (1067mm)	58¼" (1480mm)	35⁄8" (92mm)
	40" (1016mm)	56¼" (1429mm)	15⁄8" (41mm)
Rough wall opening:			
Surface Mount:	No rough opening, see overall dimensions		
Recessed:	12½" (318mm) Wide x 545/4" (1388mm) High x 7½" (191mm) Deep		
Semi-recessed:	12½" (318mm) Wide x 54%" (1388mm) High x 3½" (89mm) Deep		